



HD - Horizontal Displacement




DA - Deflection Angular



Ext - Extension



Comp - Compression



Technical Data

Max Pressure 16 Bar


Working Temperature -20°C to +100°C EPDM
-20°C to +80°C NBR

PN16 Screwed Flexible Connector

Features

- Screwed BSP Taper BS21
- EPDM/NBR Body
- Galvanised Malleable Iron Union Ends
- Nylon Cord Fabric with Steel Reinforcement

Pressure / Temperature

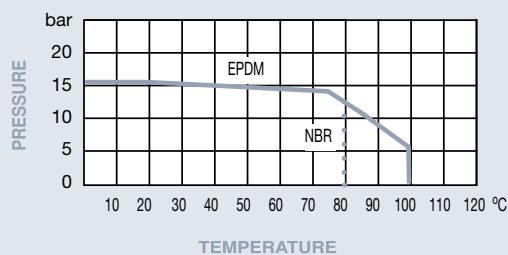

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
L	200	200	200	200	200	200	245	245
HD	22	22	22	22	22	22	24	24
DA	45°	45°	45°	45°	45°	45°	45°	45°
Ext	5.6	5.6	5.6	5.6	5.6	5.6	8.10	8.10
Comp	22	22	22	22	22	22	24	24
Kgs	0.70	0.90	1.15	1.40	1.65	2.25	3.25	4.20

N.	Part Name	Materials 400	Materials 410
1	Body	EPDM	NBR
2	Reinforcement	Nylon Cord Wire	Nylon Cord Wire
3	Pressure Ring	Steel Wire	Steel Wire
4	Union End	Malleable Iron	Malleable Iron